

**U.S. DEPARTMENT OF ENERGY
OFFICE OF CIVILIAN RADIOACTIVE WASTE MANAGEMENT**

**PRESENTATION TO
THE NUCLEAR WASTE TECHNICAL REVIEW BOARD**

**SUBJECT: ENGINEERED BARRIER
SYSTEM PERFORMANCE**

PRESENTER: DR. ABRAHAM E. VAN LUIK

**PRESENTER'S TITLE
AND ORGANIZATION: STAFF SCIENTIST,
PACIFIC NORTHWEST LABORATORY**

**PRESENTER'S
TELEPHONE NUMBER: (202) 646-5207**

MAY 16-17, 1989

**U.S. DEPARTMENT OF ENERGY
OFFICE OF CIVILIAN RADIOACTIVE WASTE MANAGEMENT**

**PRESENTATION TO
THE NUCLEAR WASTE TECHNICAL REVIEW BOARD**

**SUBJECT: ENGINEERED BARRIER
SYSTEM PERFORMANCE**

PRESENTER: DR. ABRAHAM E. VAN LUIK

**PRESENTER'S TITLE
AND ORGANIZATION: STAFF SCIENTIST,
PACIFIC NORTHWEST LABORATORY**

**PRESENTER'S
TELEPHONE NUMBER: (202) 646-5207**

MAY 16-17, 1989

SCOPE OF PRESENTATION


- **DESCRIPTION OF THE WASTE PACKAGE/ENGINEERED BARRIER SYSTEM**
- **THE ENVIRONMENTAL ASSESSMENT'S (EA) ENGINEERED BARRIER SYSTEM PERFORMANCE EVALUATION**
- **THE SITE CHARACTERIZATION PLAN'S (SCP) ENGINEERED BARRIER SYSTEM PERFORMANCE ASSESSMENT PROGRAM**

ENGINEERED BARRIER SYSTEM DEFINITIONS


- **ENGINEERED BARRIER SYSTEM (EBS):**
 - **WASTE PACKAGES**
 - **THE UNDERGROUND FACILITY**
- **THE EDGE OF THE EBS IS THE EDGE OF THE EXCAVATION**

CONCEPTUAL WASTE PACKAGE DESIGNS FOR HIGH-LEVEL WASTE AND SPENT NUCLEAR FUEL

HIGH-LEVEL WASTE CONTAINER

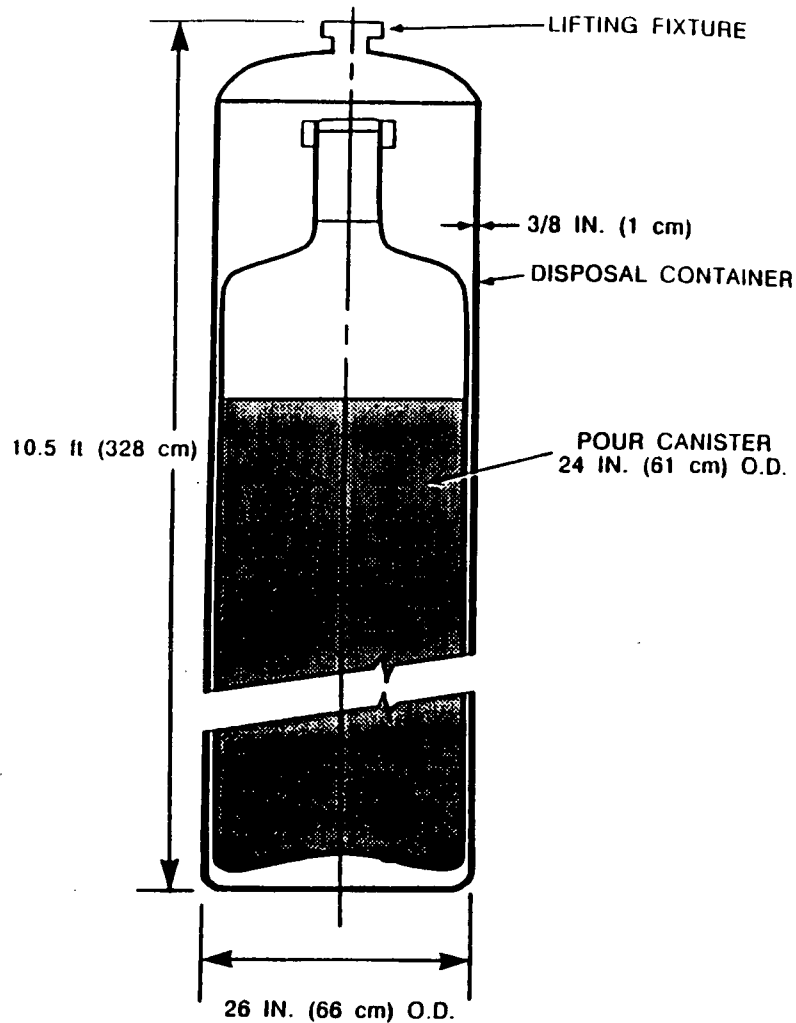


SPENT NUCLEAR FUEL CONTAINER

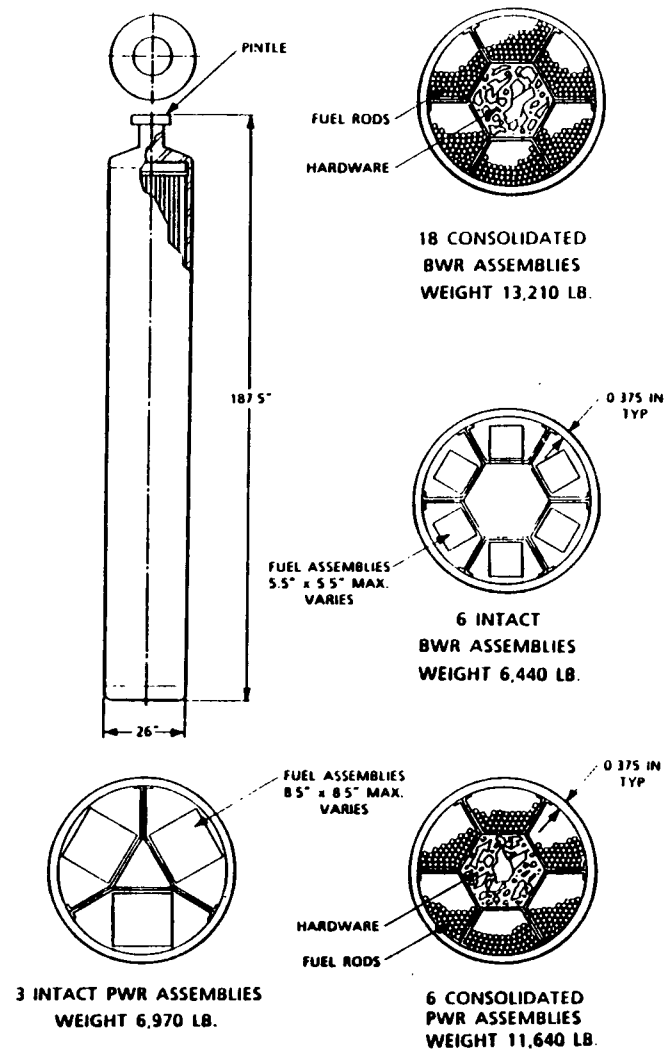


DETAIL OF WASTE PACKAGE EMPLACEMENT OPTIONS

VERTICAL EMPLACEMENT

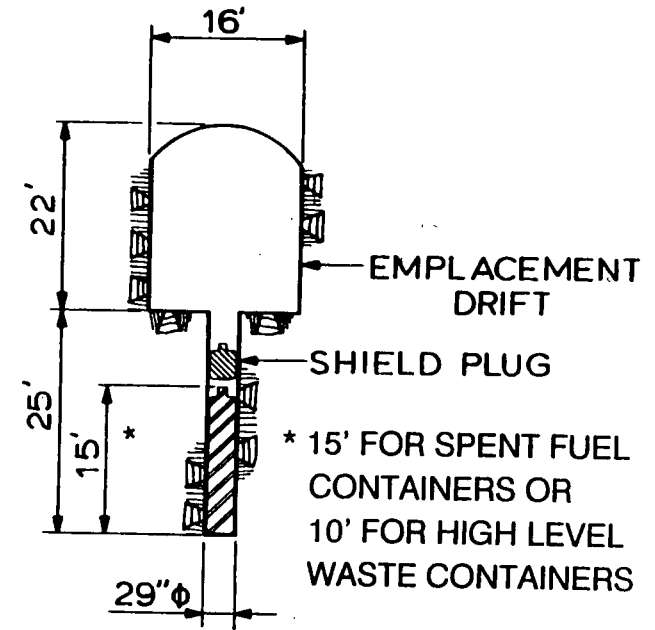

HORIZONTAL EMPLACEMENT

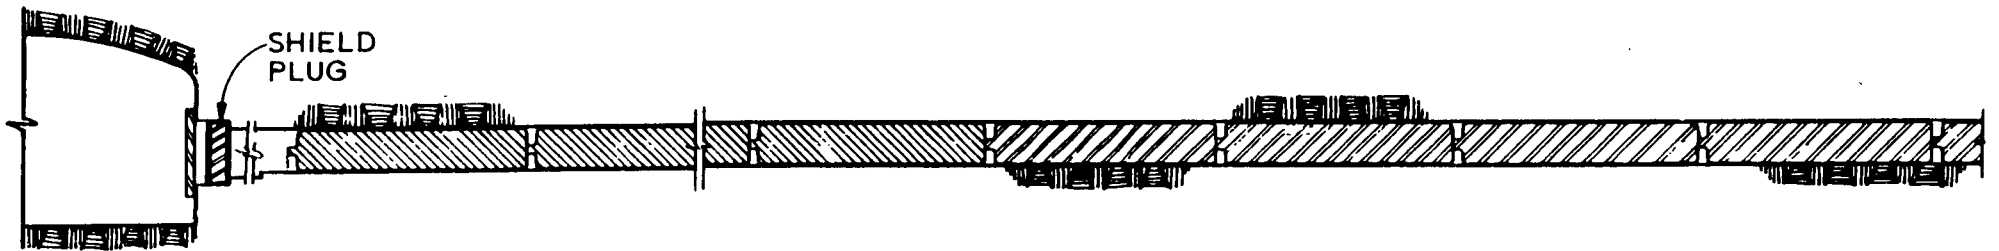

8 DUMMY CONTAINERS

EITHER 14 SPENT FUEL OR 18 HIGH LEVEL WASTE CONTAINERS

SCOPE OF PRESENTATION

- **DESCRIPTION OF THE WASTE PACKAGE/ENGINEERED BARRIER SYSTEM**

- **THE ENVIRONMENTAL ASSESSMENT'S (EA) ENGINEERED BARRIER SYSTEM PERFORMANCE EVALUATION**

- **THE SITE CHARACTERIZATION PLAN'S (SCP) ENGINEERED BARRIER SYSTEM PERFORMANCE ASSESSMENT PROGRAM**

SCP

THE ENVIRONMENTAL ASSESSMENT RELEASE RATE CALCULATION FOR A FAILED SPENT FUEL CONTAINER

$$\dot{M} = FAS$$

\dot{M} - MASS LOSS FROM CONTAINER

F - FLUX OF WATER [$5 \times 10^{-4} \text{ m}^3/\text{m}^2\text{-yr}$]

A - CONTAINER AREA NORMAL TO THE FLUX [0.33 m^2]

S - SOLUBILITY LIMIT OF WASTE MATRIX [$5 \times 10^{-2} \text{ kg}/\text{m}^3$]

$$\dot{M} = 5 \times 10^{-4} \frac{\text{m}}{\text{yr}} \cdot 0.33 \text{m}^2 \cdot 5 \times 10^{-2} \frac{\text{kg}}{\text{m}^3} = 8.3 \times 10^{-6} \frac{\text{kg}}{\text{yr}}$$

$$\text{FRACTIONAL RELEASE RATE: } \frac{\dot{M}}{3.3 \times 10^3 \text{ kg}} = 2.5 \times 10^{-9}/\text{yr}$$

ASSUMPTIONS AND LIMITATIONS OF THE ENVIRONMENTAL ASSESSMENT EBS PERFORMANCE CALCULATION

● SCENARIO

- NO RELEASE OCCURS IF NO LIQUID WATER CONTACTED THE WASTE PACKAGE**
- A BOUNDING FLUX RATE OVER AN EFFECTIVE AREA CONTACTED EACH WASTE PACKAGE**
- CONCEPTUAL HYDROLOGIC MODELS ARE NEEDED TO DEFINE THE FLUX AND THE AMOUNT OF LIQUID WATER THAT MAY CONTACT A WASTE PACKAGE**
- GASEOUS RELEASES MAY NEED TO BE MODELED EVEN IF NO LIQUID WATER CONTACTS A WASTE PACKAGE**

ASSUMPTIONS AND LIMITATIONS OF ENVIRONMENTAL ASSESSMENT'S EBS PERFORMANCE CALCULATION

(CONTINUED)

● CONTAINER DEGRADATION

- SINGLE FAILURE TIME USED FOR ALL CONTAINERS
(3,000 YEARS)**
- FAILURE TIME ESTIMATE BASED ON EXPERIMENTAL RESULTS
FOR ONE CONTAINER METAL AND ONE FAILURE MODE**
- ENVIRONMENTS NEED TO BE DEFINED**
- DEGRADATION MODES FOR REFERENCE AND ALTERNATE
METALS NEED TO BE DEFINED FOR ENVIRONMENTS**
- DEGRADATION RATES NEED TO BE DEFINED**
- CONTAINMENT FAILURE TIMES NEED TO BE MODELED**

ASSUMPTIONS AND LIMITATIONS OF ENVIRONMENTAL ASSESSMENT EBS PERFORMANCE CALCULATION

(CONTINUED)

● **RELEASE RATE**

- **A CONGRUENT DISSOLUTION RATE WAS USED**
- **OTHER RELEASE PROCESSES NEGLECTED**
- **DISSOLUTION RATE BASED ON UNCERTAIN UO_2 SOLUBILITY LIMIT**
- **CONTINUOUS HYDROLOGIC PATHWAY ASSUMED**
- **ELEVATED TEMPERATURE AND RADIATION FLUX NEGLECTED
(ARTIFACT OF 3,000 YEAR CONTAINMENT TIME)**

SCOPE OF PRESENTATION

- **DESCRIPTION OF THE WASTE PACKAGE/ENGINEERED BARRIER SYSTEM**
- **THE ENVIRONMENTAL ASSESSMENT'S (EA) ENGINEERED BARRIER SYSTEM PERFORMANCE EVALUATION**
- **THE SITE CHARACTERIZATION PLAN'S (SCP) ENGINEERED BARRIER SYSTEM PERFORMANCE ASSESSMENT PROGRAM**

THE SITE CHARACTERIZATION PROGRAM

A. PERFORMANCE ISSUES

- ISSUE 1.4, CONTAINMENT**
- ISSUE 1.5, RELEASE RATE**

B. INFORMATION NEEDS

- SITE CHARACTERISTICS**
- WASTE PACKAGE ENVIRONMENTS**
- MATERIALS PROPERTIES AND BEHAVIORS**

C. STUDIES

- IN SITU AND LABORATORY TESTING**
- MODEL DEVELOPMENT AND TESTING**
- PERFORMANCE AND UNCERTAINTY ANALYSES**

SITE CHARACTERIZATION PLAN PERFORMANCE CALCULATION HIERARCHY

- **PARTITIONS THE MODELING CONTRIBUTIONS INTO MANAGEABLE MODELING UNITS**
 - **MODELING UNITS ARE, AT MECHANISTIC/PROCESS LEVELS, LINKED TO SITE AND LABORATORY DATA COLLECTING PROGRAMS**
 - **ITERATIVE PROCESS USING DATA TO TEST THE MODEL, THEN USING UNCERTAINTY AND SENSITIVITY ANALYSES TO DEFINE FURTHER DATA-GATHERING PRIORITIES, FOCUSES EFFORT ON REDUCTION OF UNCERTAINTIES**

ENGINEERED BARRIER SYSTEM PERFORMANCE

CALCULATION HIERARCHY



LEGEND

- PRODUCT

- MODEL


- SUBMODEL

EBS - ENGINEERED BARRIER SYSTEM

WP - WASTE PACKAGE

HLF - HIGHER-LEVEL FINDINGS

9 designs
2 phases

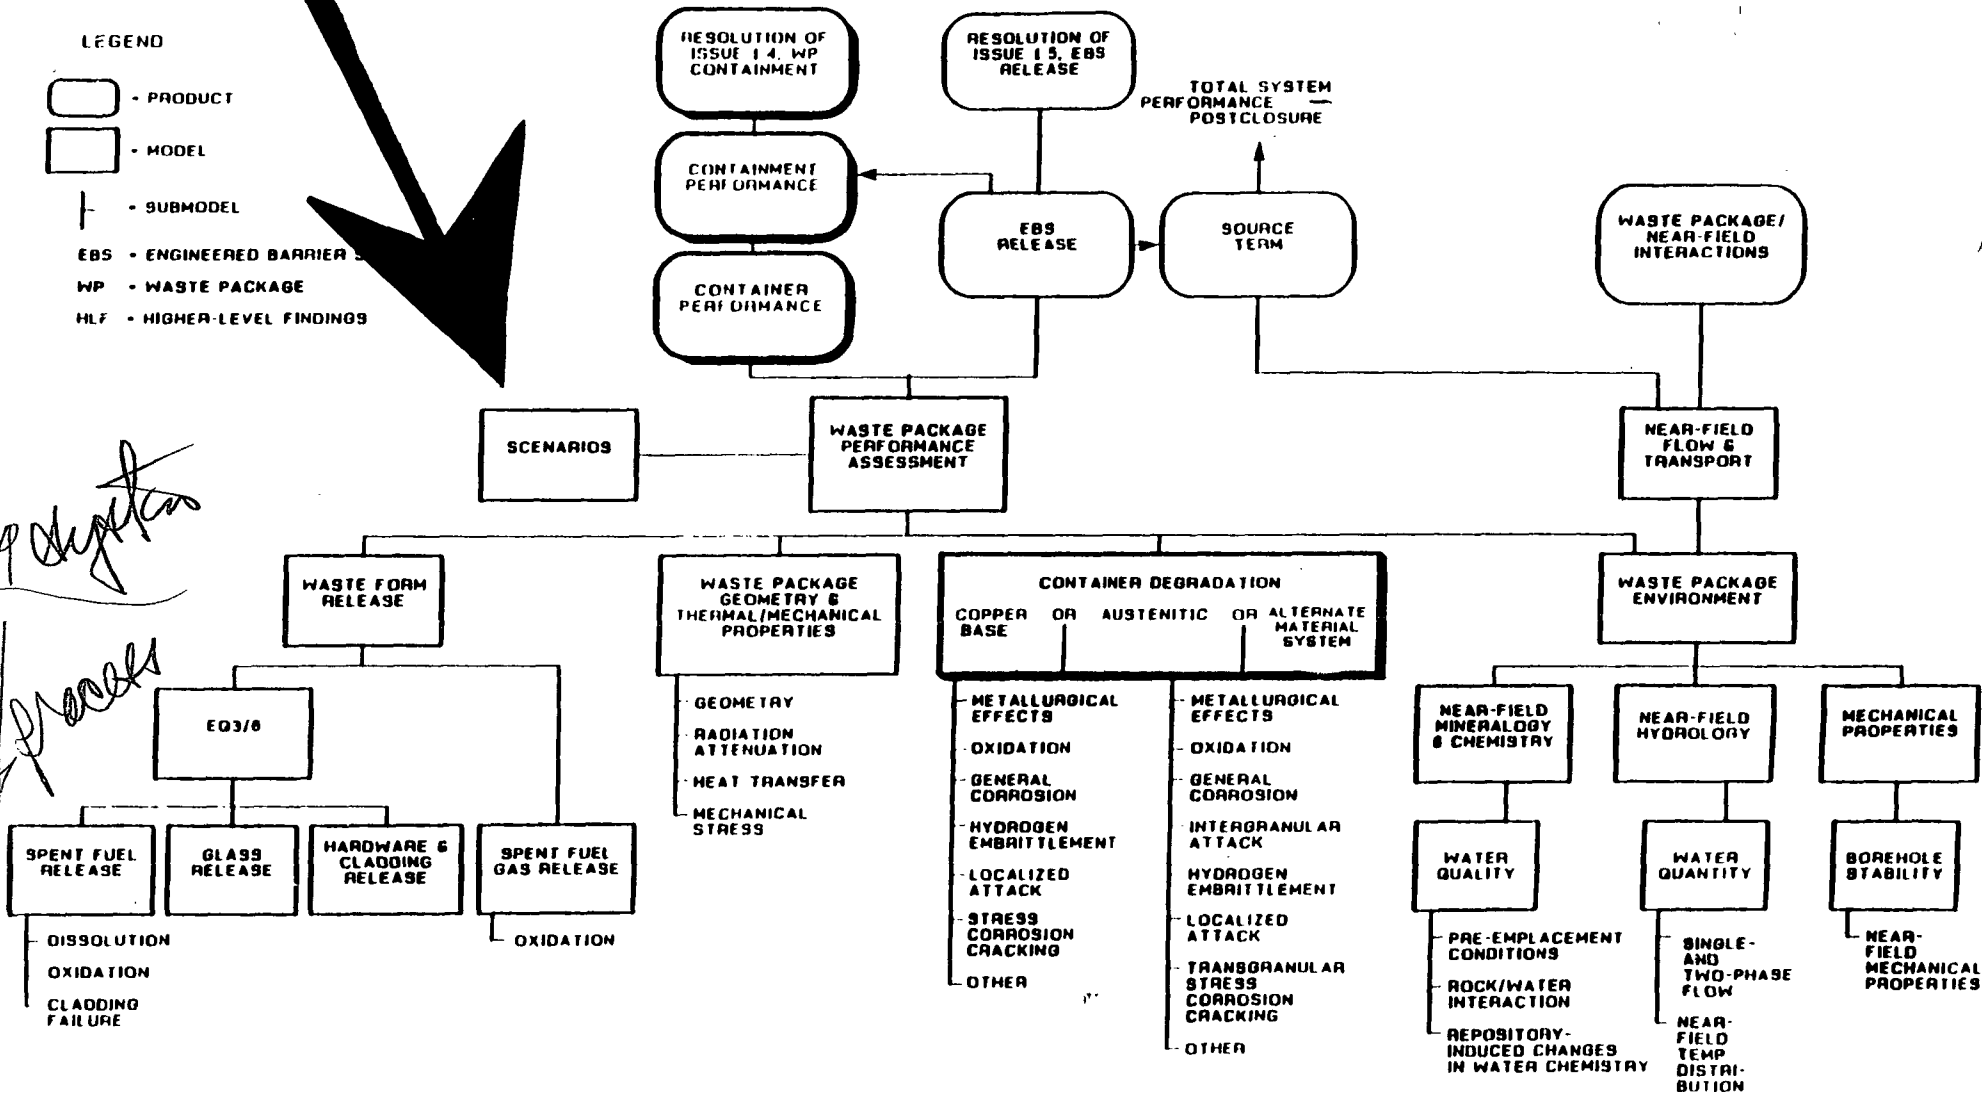


WASTE PACKAGE FAILURE SCENARIOS: "WET" AND "DRY"

- **THE EXPECTED CASE IS THE "DRY" CASE; LIQUID WATER WILL NOT CONTACT THE WASTE PACKAGE:**
 - **UNSATURATED NEAR FIELD ROCK**
 - **LIKELIHOOD THAT MATRIX FLOW PREDOMINATES**
 - **WASTE PACKAGE TEMPERATURE EXCEEDS AMBIENT**
 - **ENGINEERED AIR GAP BREAKS HYDROLOGIC CONTINUITY**


- **AN UNEXPECTED BUT CREDIBLE CASE IS THE "WET" CASE; THE AIR GAP HAS FAILED, OR THERE IS LIQUID WATER DRIPPING ONTO A WASTE PACKAGE**

DRY AND WET CASE RELEASE SCENARIOS

**NO LIQUID WATER
CONTACTS WASTE PACKAGE
(EXPECTED CASE)**


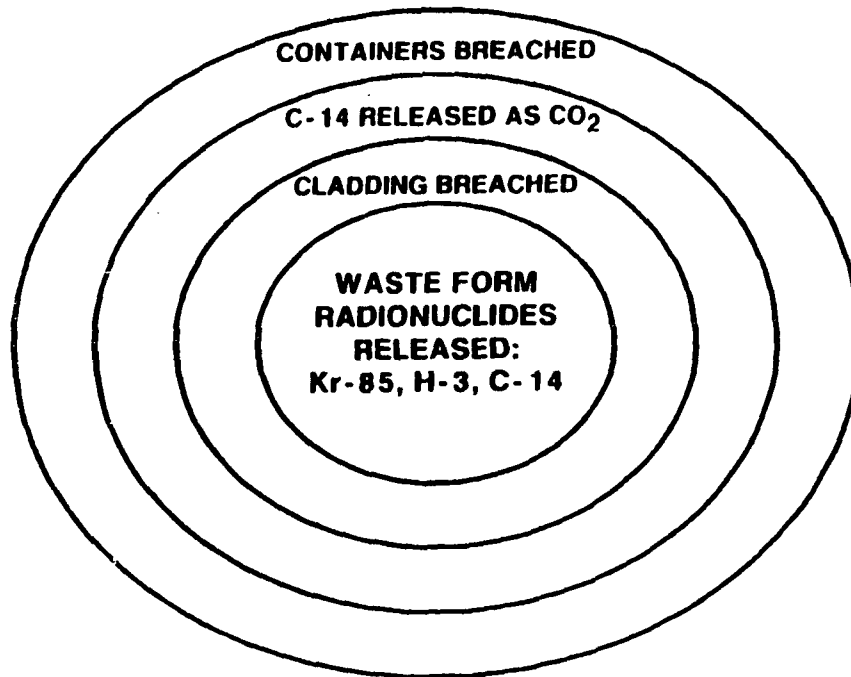


**SOME LIQUID WATER
CONTACTS WASTE PACKAGE**

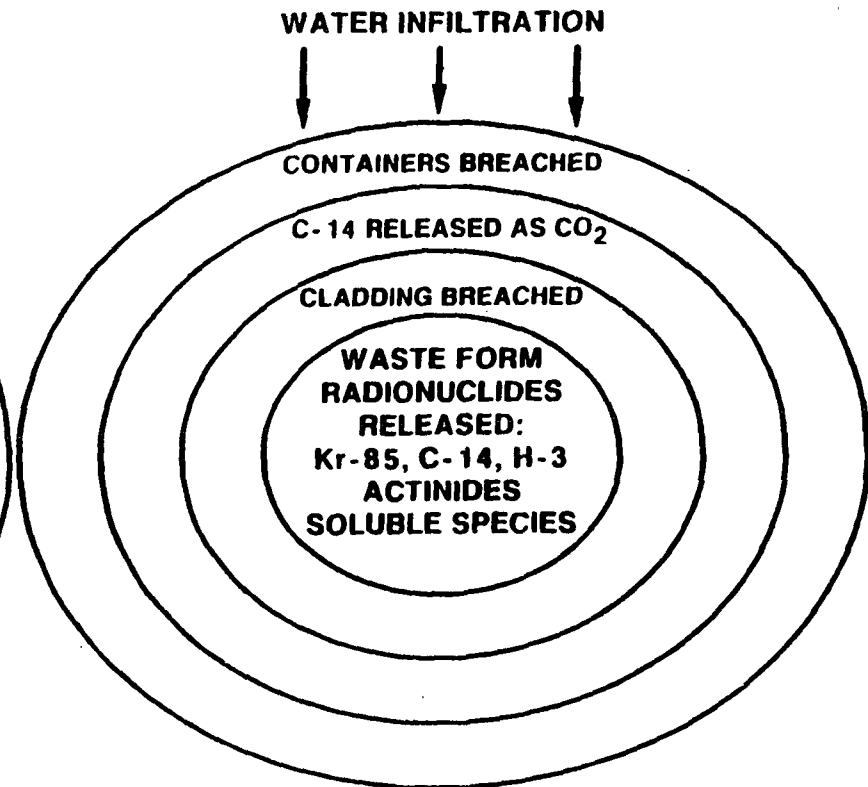


THE AIR GAP IN WASTE PACKAGE EMPLACEMENT: ENHANCING PERFORMANCE BY BREAKING HYDROLOGIC CONTINUITY

Depth main?

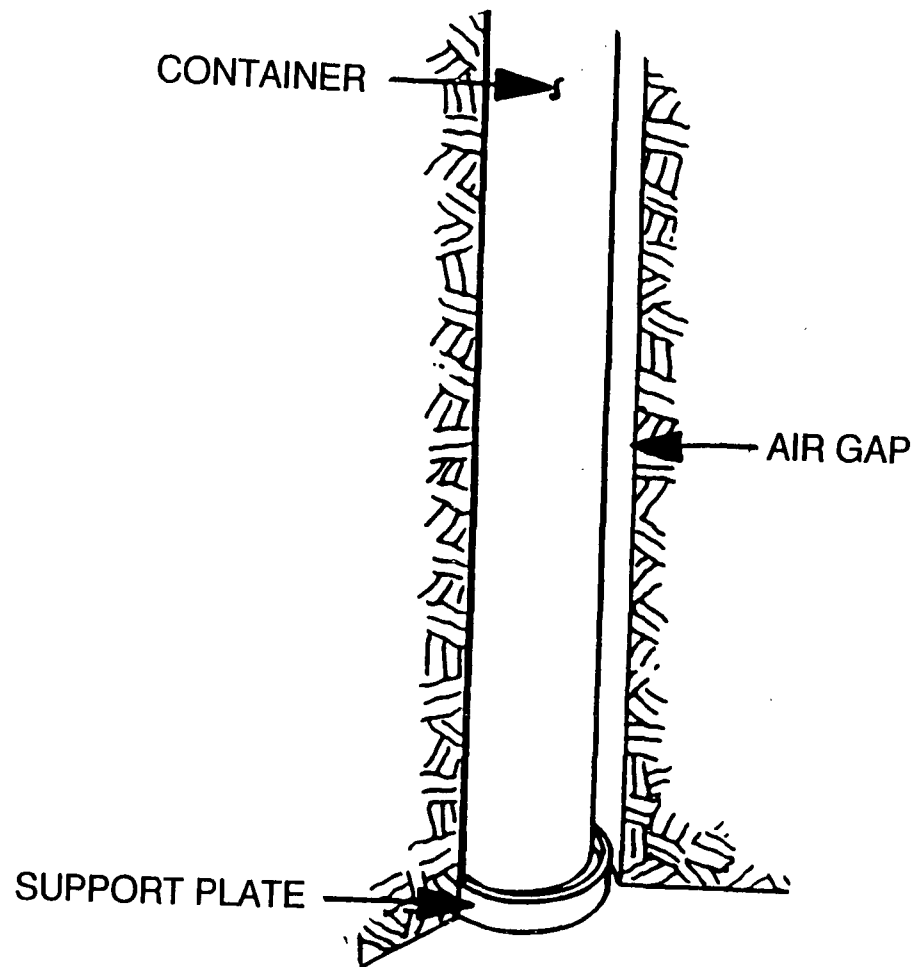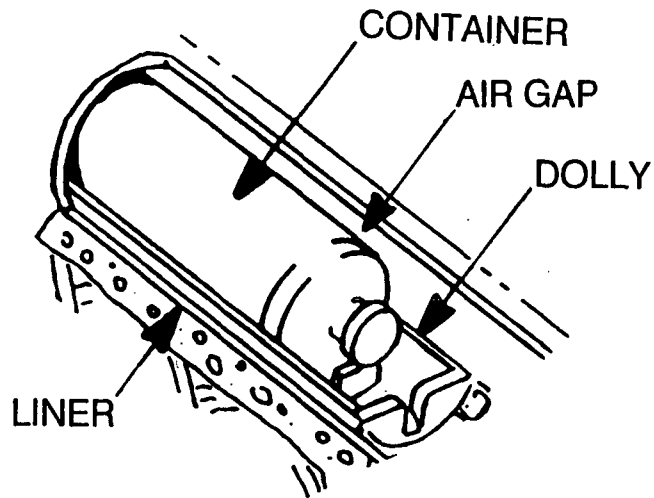


TWO FAILED AIR GAP SCENARIOS

DRIPPING WATER

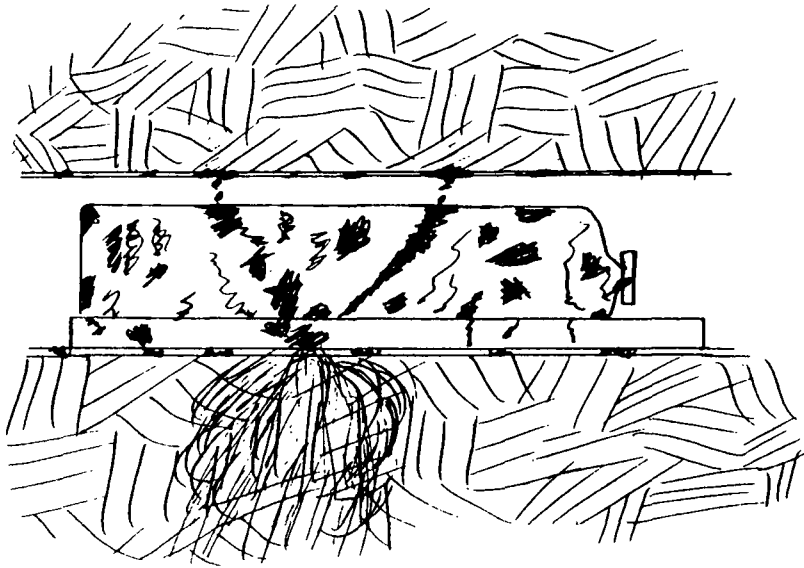


COMPROMISED AIR GAP

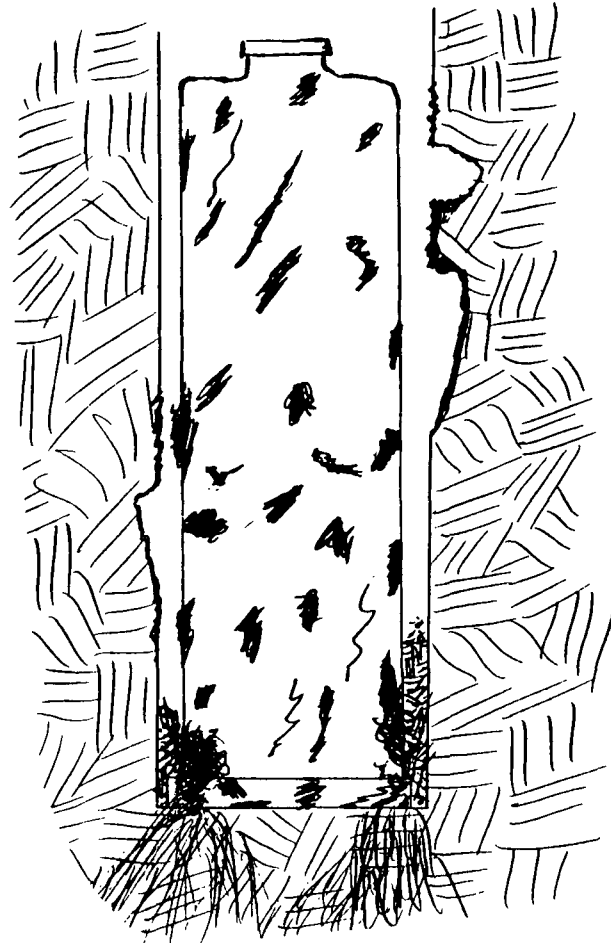

ENGINEERED BARRIER SYSTEM PERFORMANCE

CALCULATION HIERARCHY

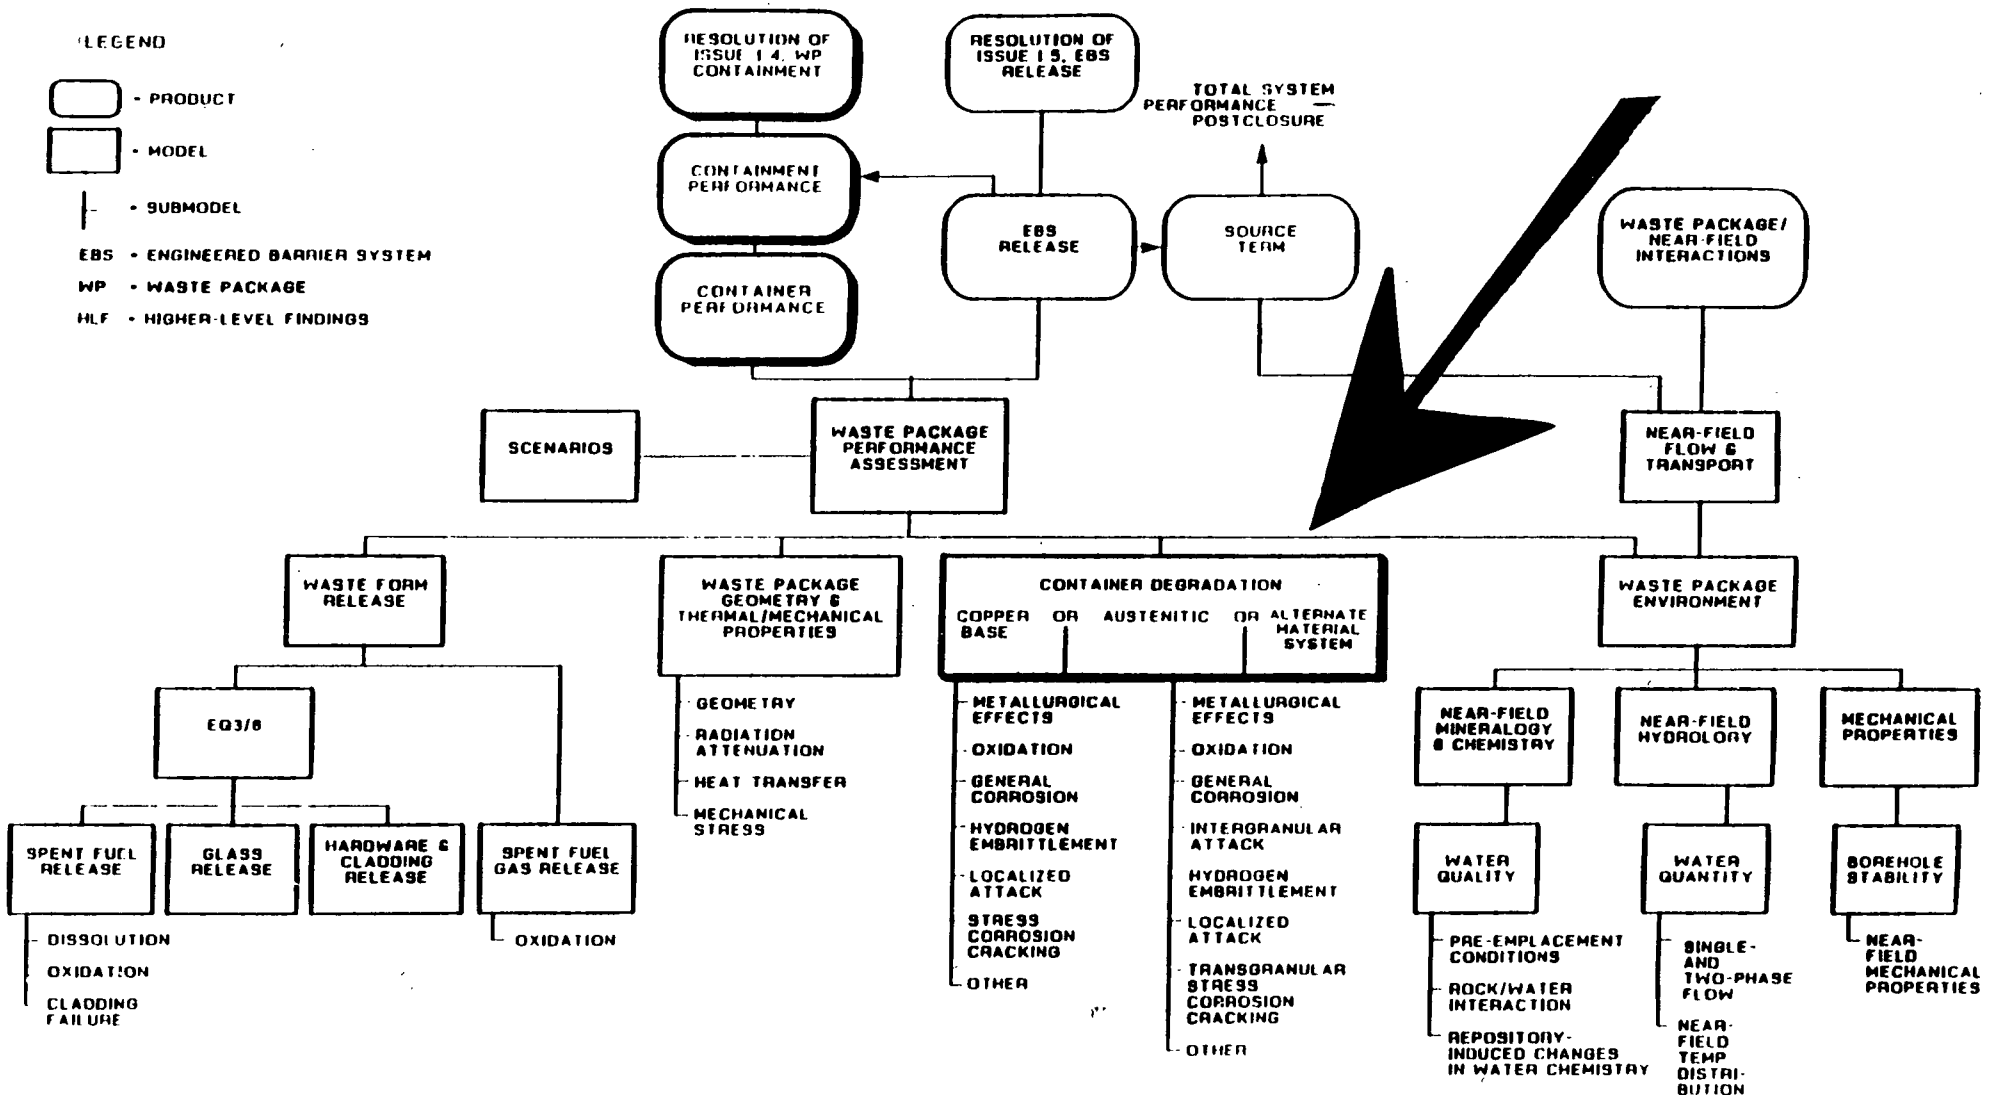

CONTAINER DEGRADATION MODELING PROGRAM

● SYSTEMATIC LABORATORY TESTING

- IDENTIFY DEGRADATION MODES
- IDENTIFY PHENOMENOLOGY
- DEVELOP PARAMETRIC DEPENDENCIES (OCCURRENCES AND RATES)
- IDENTIFY MECHANISMS


● CONTAINER DEGRADATION MODELING

- DEVELOP PRELIMINARY MODELS
- DEFINE TESTS OF MODELS, CONSIDER ALTERNATE MODELS
- COMPARE PREDICTIONS TO EXPERIMENTS AND REFINE MODELS

● WASTE PACKAGE SYSTEM MODELING

- COMBINE MODE-SPECIFIC MODELS INTO ONE MODEL FOR ALL MODES
- PREDICT BEHAVIOR UNDER RANGE(S) OF REPOSITORY CONDITIONS
- PERFORM SENSITIVITY AND UNCERTAINTY ANALYSIS

ENGINEERED BARRIER SYSTEM PERFORMANCE CALCULATION HIERARCHY

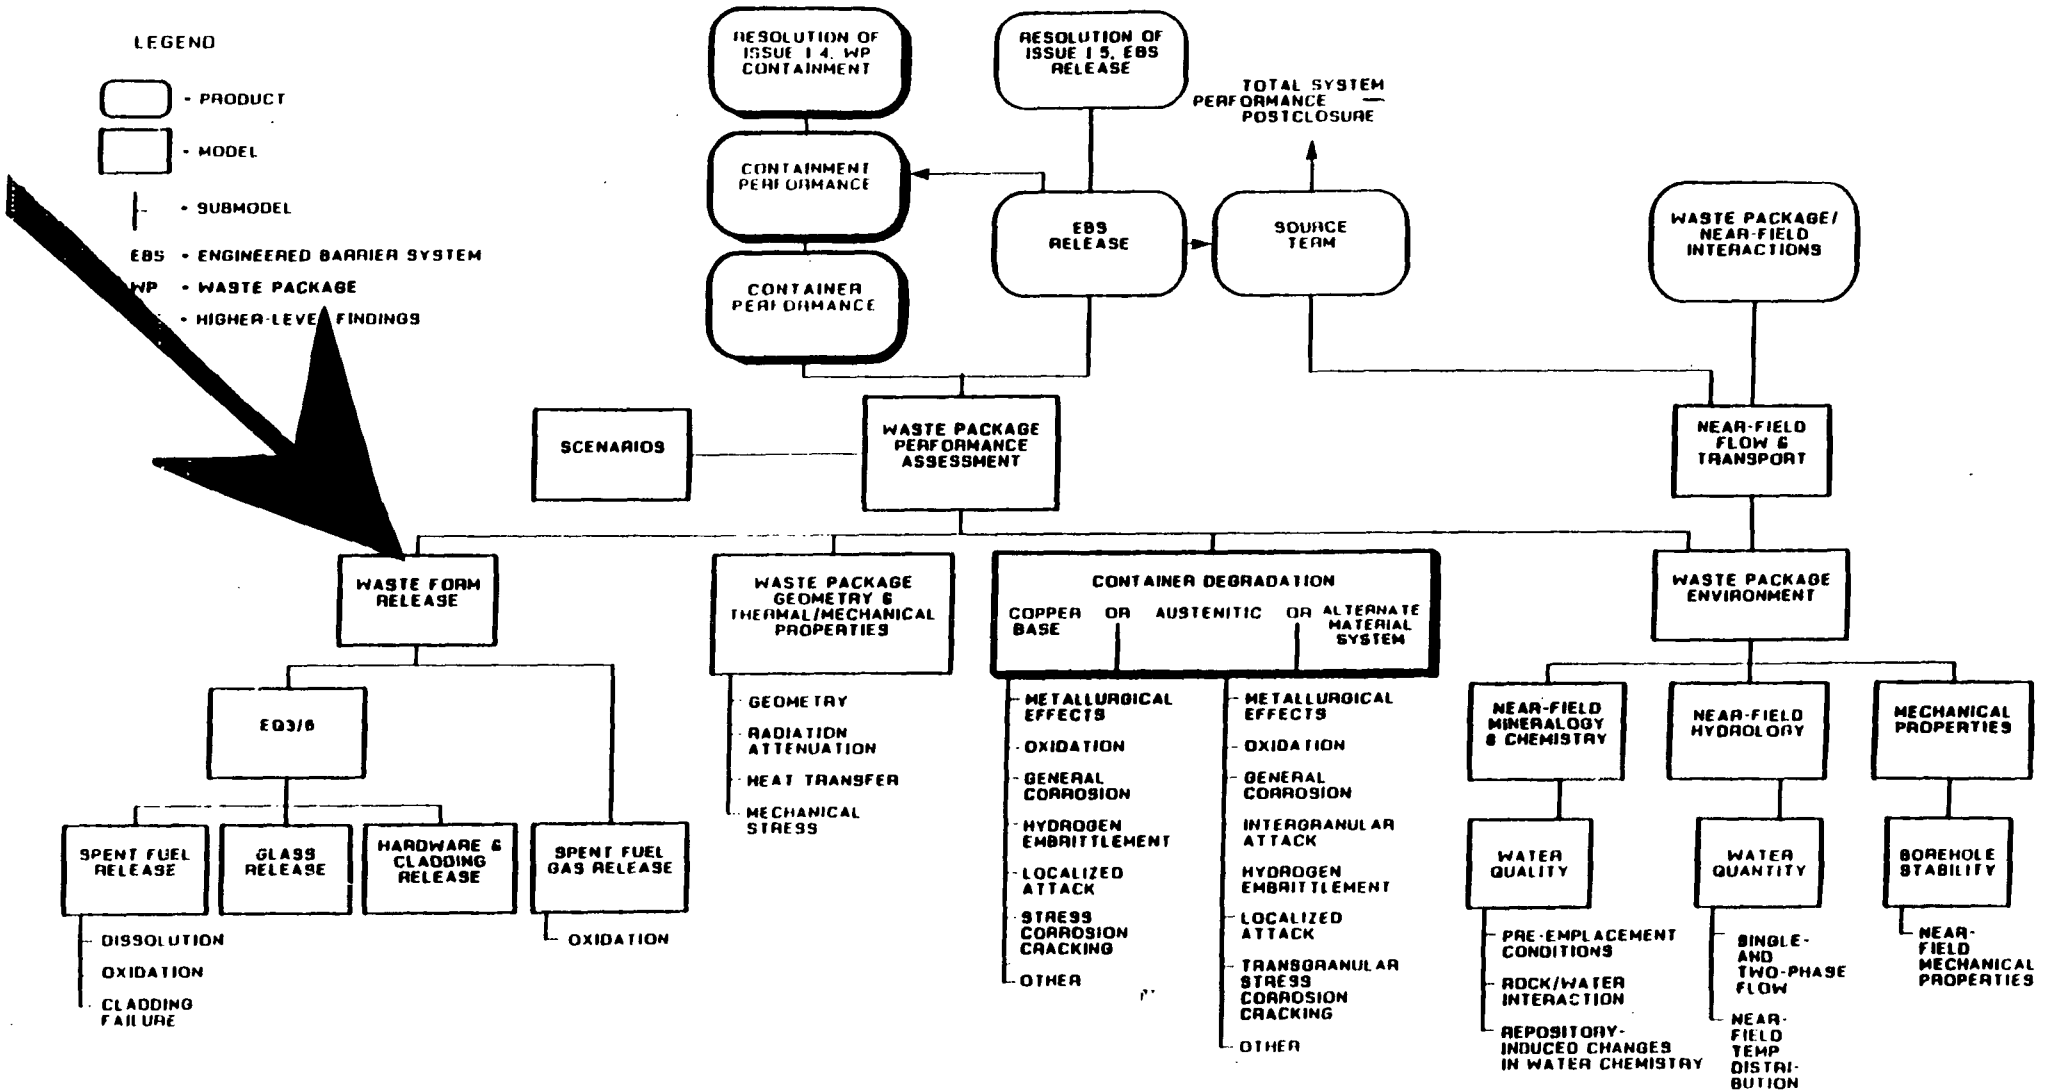

LIQUID PATHWAY RELEASE MODELING

- **RAPID RELEASE IS ASSUMED FOR SPENT FUEL GAP AND GRAIN-BOUNDARY RADIONUCLIDE INVENTORIES (A FEW PERCENT OF TOTAL)**

- **RADIONUCLIDE-SPECIFIC RELEASE MAY BE CALCULATED AS A FUNCTION OF:**
 - **RADIONUCLIDE CONCENTRATION AT WASTE FORM SURFACE**
 - **MASS FRACTION IN WASTE FORM**
 - **FORWARD RATE OF MATRIX DISSOLUTION**
 - **RADIONUCLIDE RETARDATION**
 - **FLUX OF GROUNDWATER**
 - **OTHER FACTORS (RATES OF ALTERATION PHASE FORMATION, COLLOID FORMATION, AND CLADDING DEGRADATION)**

- **IF GROUNDWATER FLUX IS VERY LOW, DIFFUSION-CONTROLLED FLUX MAY BE CALCULATED AS A FUNCTION OF:**
 - **RADIONUCLIDE CONCENTRATION AT WASTE FORM SURFACE**
 - **POROSITY**
 - **RADIONUCLIDE DIFFUSION COEFFICIENT**
 - **RADIONUCLIDE RETARDATION**

GAS PATHWAY RELEASE MODELING

- **THE RADIONUCLIDE GAS FRACTION MAY BE CALCULATED AS A FUNCTION OF:**
 - INITIAL GAS INVENTORY
 - RADIONUCLIDE GAS PRODUCTION RATE (e.g. $^{14}\text{CO}_2$)
 - GAS ADVECTION VELOCITY
 - RADIONUCLIDE GAS PARTITIONING INTO GROUNDWATER
 - GAS-FILLED POROSITY/TORTUOSITY
 - DIFFUSION COEFFICIENT
 - APERTURE OF CONTAINER/CLADDING FAILURE


- **THE PRODUCTION RATE OF A GASEOUS RADIONUCLIDE MAY BE CALCULATED AS A FUNCTION OF:**
 - CONTAINER FAILURE RATE
 - RADIONUCLIDE VOLATILITY
 - CLADDING DEGRADATION RATE

ENGINEERED BARRIER SYSTEM PERFORMANCE CALCULATION HIERARCHY

LEGEND

- PRODUCT
- MODEL
- | - SUBMODEL

- EBS - ENGINEERED BARRIER SYSTEM
- WP - WASTE PACKAGE
- HLF - HIGHER-LEVEL FINDINGS

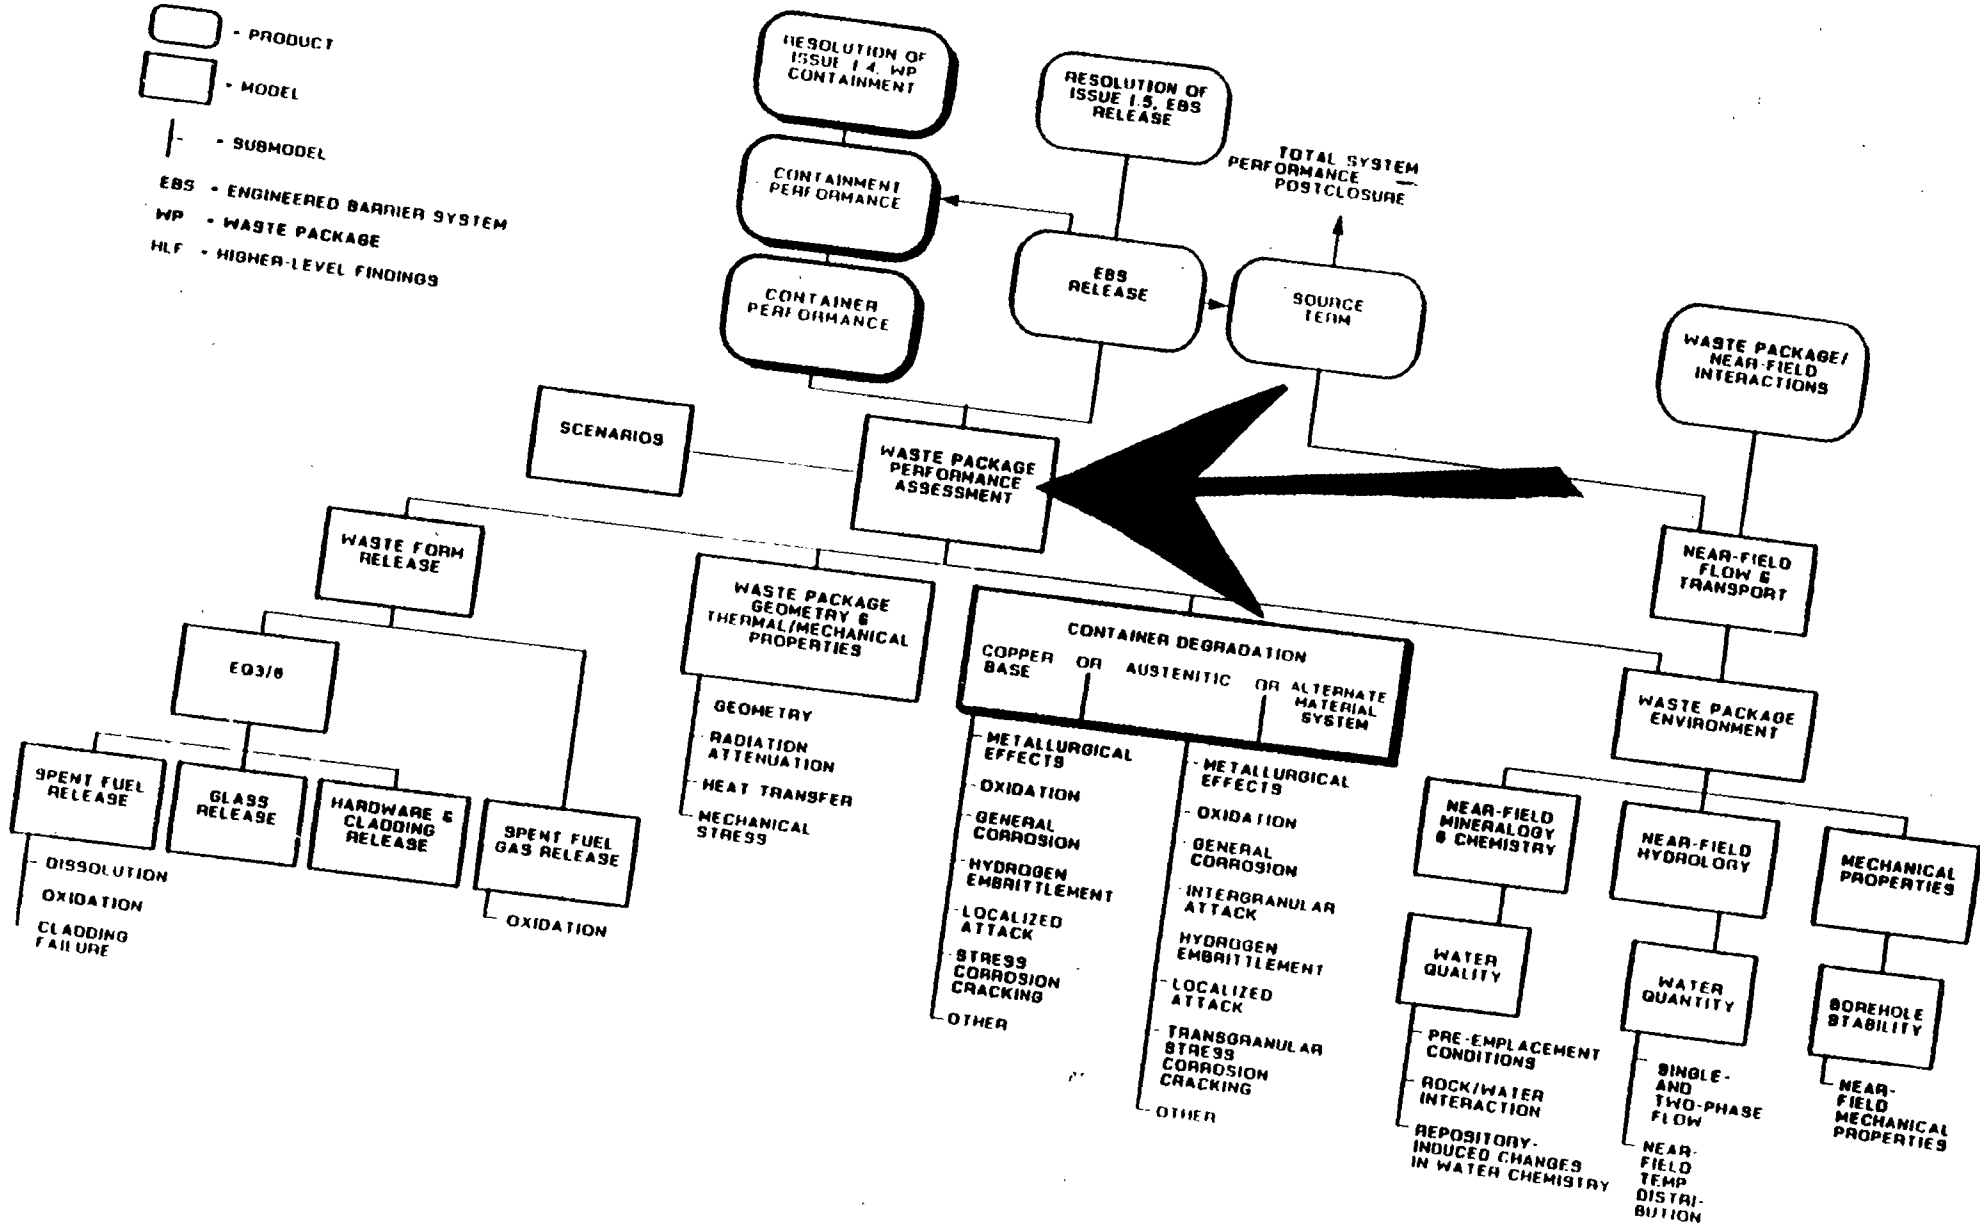

WASTE PACKAGE PERFORMANCE ASSESSMENT PROGRAM

● WASTE PACKAGE ENVIRONMENTS

- SUBMODELS**
- CALCULATIONAL MODELS**
- CALCULATION OF CONDITIONS**

● CONTAINER DEGRADATION

- DEGRADATION MODES**
- INITIATING CONDITIONS AND PROCESS RATES**
- PROJECTION OF FAILURE RATES**

WASTE PACKAGE PERFORMANCE ASSESSMENT PROGRAM

(CONTINUED)

● **ENGINEERED BARRIER SYSTEM RELEASE RATE**

- **SUBMODELS**
- **MASS TRANSFER MODELS**
- **CALCULATION OF RELEASE PERFORMANCE**

● **INPUT TO TOTAL SYSTEM PERFORMANCE**

- **DISRUPTIVE PROCESS AND EVENT SUBMODELS**
- **SIMPLIFIED ENGINEERED BARRIER SYSTEM MODEL**
- **CALCULATION OF TIME-DEPENDENT CONCENTRATIONS AT
HOST-ROCK/EBS INTERFACE**

ENGINEERED BARRIER SYSTEM PERFORMANCE MODELING HIERARCHY

- **SYSTEM LEVEL MODELING:**

eg: PANDORA (DETERMINISTIC); AREST (PROBABILISTIC)

- **PROCESS MODELING**

eg: ORIGEN2 (WASTE RADIONUCLIDE CONTENT, HEAT AND RADIATION OUTPUT); ADINAT (CONDUCTIVE AND CONVECTIVE HEAT AND MASS TRANSFER); EQ3/EQ6 (SPECIATION/SOLUBILITY AND REACTION PATHS); SPECTROM 31 (ROCK STRESS AND FRACTURE ALTERATIONS)

- **MECHANISTIC MODELING**

eg: CONTAINER FAILURE MODE MODELS AND WASTE FORM DEGRADATION MODELS AT THE MECHANISTIC LEVEL OF DETAIL, IF POSSIBLE

ENGINEERED BARRIER PERFORMANCE ASSESSMENT ACTIVITIES FOR FY 1989-90

- **BENCHMARKING**

- USING PROBLEM SETS CURRENTLY BEING DEFINED
- USING A PRELIMINARY ANALYSIS COMPLETED IN FY 1988
- AREST/SYVAC-VAULT COMPARISON

- **SENSITIVITY AND UNCERTAINTY ANALYSES TO
HELP GUIDE TESTING**

- **MODEL DEVELOPMENT**

- **PRELIMINARY ANALYSIS OF GLASS WASTE FORM
PERFORMANCE**